
LATERAL





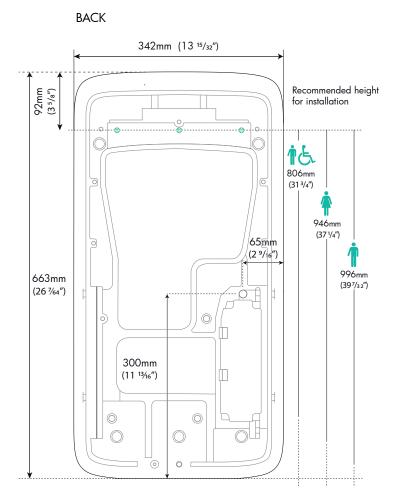

150mm 70mm (2 ³/4") 240mm (9 ²9/64")

Electric system		
Input voltage	220 - 240 V	110 - 120 V
Frequency	50/60 Hz	50/60 Hz
Nominal power	1100 W	1000 W
Electric current	5A	9A
Type of motor	Universal	Universal
Motor speed	23000 RPM	21500 RPM
Working temperature	40 °C/104 °F	40 °C/104 °F

Manufacturing	
Cover material: ABS	
Treated with Biomaster Silver lons antibacterial additive	
Finish: Various colours	
Mounting mooring: Galvanized steel	
Water inlet protection: IPX2	

Operation

Automatic activation

Approx hand drying time: 12 seconds

Blocking time: 25 seconds

Airflow: Up to 73 l/s (19,3 gal/s)

Logistics

Net weight: 7,9 Kg (16,4 lb)

Gross weight: 9,5 Kg (20,9 lb)

Box dimensions: 710mm / 390mm / 290mm

(H27 6%4" W15 23/4" D11 27/4")

Regulations

This device complies with the following directives/normatives: 1999/5/CE 2004/108/CE 2006/95/CE 2002/96/EC 2011/65/EC







Others

This unit has Bluetooth" technology

Standard warranty

5 years for parts and 1 year for labour (see conditions)

NOTE: ffuuss $^{\text{TM}}$ reserves the right to make changes without prior notice.

Filter: HEPA H13